

JIF-15B Weighing Indicator

Features




- Industrial grade design for tough industrial environments
- Noise and interference protection. Efficiently block the interference of power, microwave
- Standard equipment: Independent RS 232 Current Loop & Data Clock Output interface
- 5 stages of linear calibration, providing higher system accuracy
- 24 bits Internal A/D resolution reaches 24 bits
- Highly stabilized A/D sampling data
- Equipped with Self-Dialogist function, convenient for on-site maintenance



Specifications

Model	JIF-15B
Built-in Interface	RS 232 & Current Loop & Data Clock Output
Display	Weight display 7 digits, 7 segments 0.8" high red LED
Status Indicators	3 ϕ LED, Stable, Zero, Net, Gross, Tart
Min. Readability	$\times 1, \times 2, \times 5, \times 10, \times 20, \times 50$
Load cell excitation	DC 5V $\pm$ 5%, 120mA (up to 8 350 Ω Load Cells)
Memory	Calibration parameters and function settings are saved into EEPROM
Input sensitivity	0.15 μ V/D and up 1/60000 d
Max. measured voltage	-1mV - 39mV
A/D Conversion/rate	$\Delta \Sigma$ / 80 times/sec.

Sizedraft

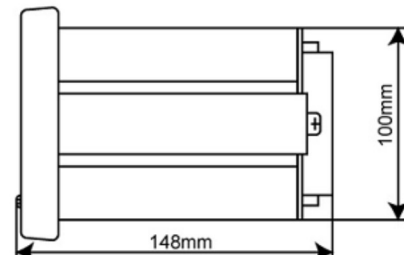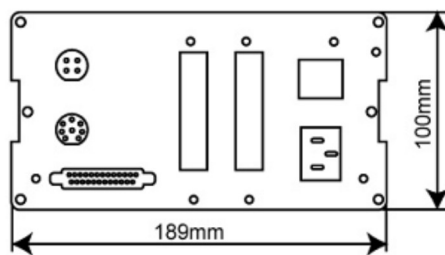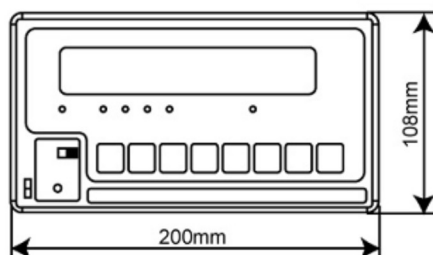

JADEVER[®]



Jadever Scale Co., Ltd.
Tel : 886-2-22990203
Fax : 886-2-22990204
http: www.jadever.com
E-mail:sales@jadever.com.tw

Xiamen Jadever Scale Co., Ltd.
Tel : 86-592-6037668
Fax : 86-592-6037028
http://www.jadever.com
E-mail:xmjadever@jadever.com.cn

Jadever Weigtech, Inc.
Tel:1-905-482-2618
Fax:1-905-887-4066
http://www.jadeverscale.com
E-mail:james@jadeverscale.com