

JIF-15C Weighing Indicator

Features




- Industrial grade design for tough industrial environments
- Noise and interference protection. Efficiently block the interference of power, microwave
- Dual display panel can display weight and several setting values simultaneously
- All the formula, settings, logic output, function setting and weight calibration can be fine-tuned or calibrated through buttons or RS 232/485
- Equipped with RS 485 or RS 232 serial interface for remote display, PC, PLC, and HMI
- Standard edition is equipped with 8 input control connector and 8 Relay output connector



Specifications

Model	JIF-15C
Decimal places	0, 0.0, 0.00, 0.000, 0.0000, 0.00000
Display	Weight display 7 digits, 7 segments 0.8" high red LED
Status Indicators	3 ϕ LED, Final, Sp3, Sp2, Sp1, Z.Band, HI/OK/LO, MD(Stable), Zero, Net, Gross
Min. Readability	$\times 1$, $\times 2$, $\times 5$, $\times 10$, $\times 20$, $\times 50$
Load cell excitation	DC 5V $\pm$ 5%, 120mA (up to 8 350 Ω Load Cells)
Memory	Calibration parameters and function settings are saved into EEPROM
Input sensitivity	0.15 μ V/D and up 1/60000 d
Max. measured voltage	-1mV - 39mV
A/D Conversion/rate	$\Delta \Sigma$ / 100 times/sec.

Sizedraft

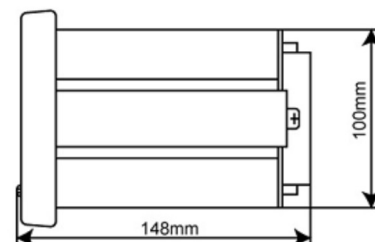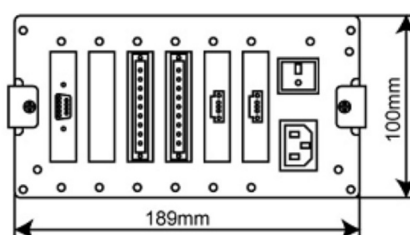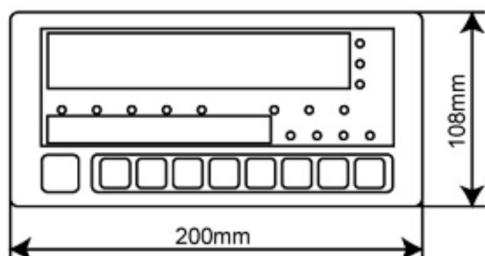

JADEVER[®]



Jadever Scale Co., Ltd.
Tel : 886-2-22990203
Fax : 886-2-22990204
http: www.jadever.com
E-mail:sales@jadever.com.tw

Xiamen Jadever Scale Co., Ltd.
Tel : 86-592-6037668
Fax : 86-592-6037028
http://www.jadever.com
E-mail:xmjadever@jadever.com.cn

Jadever Weightech, Inc.
Tel:1-905-482-2618
Fax:1-905-887-4066
http://www.jadeverscale.com
E-mail:james@jadeverscale.com