
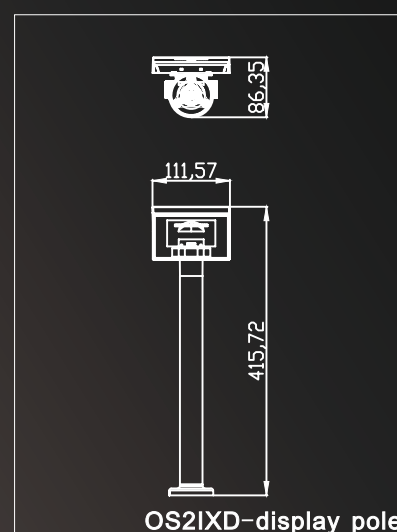
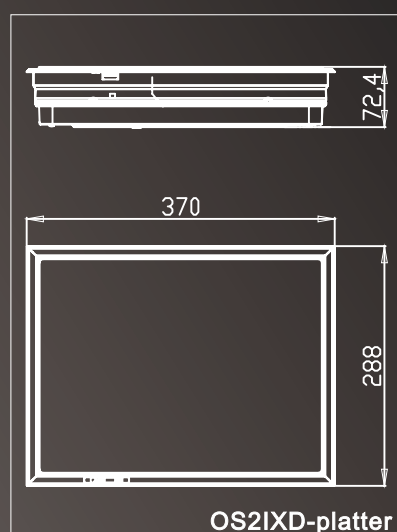
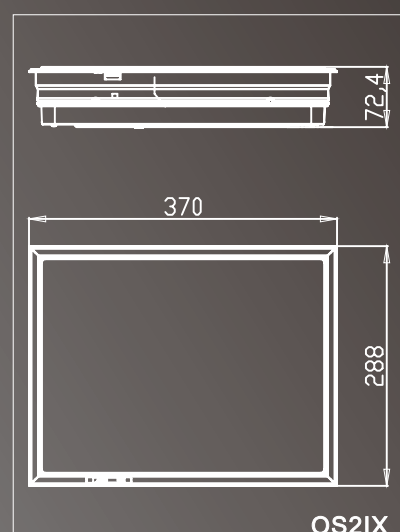
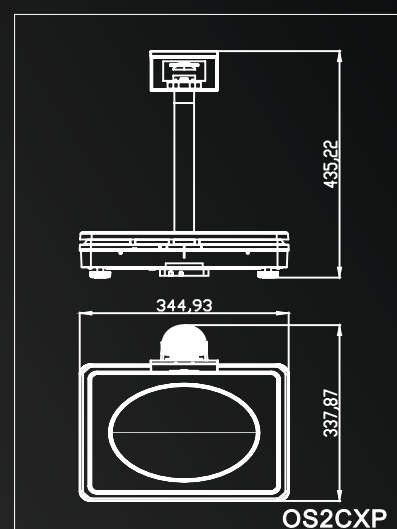
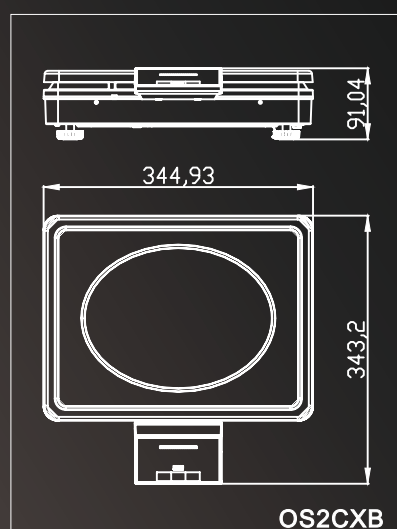


Specification

Optional types	Desktop Type OS2CX				Imbedded Type OS2IX	
	OS2CX	OS2CXK	OS2CXB	OS2CXP	OS2IX	OS2IXD
Basic Features	without display without keys	without display with two keys	with pedestal display three keys	with display pole three keys	without display with two keys	With separate pole; display & three keys
Dimension	345*263*88mm	345*263*88mm	345*343*91mm	435*345*338mm	370*288*72mm	Platter 370*288*72mm Pole 416*112*86mm
Customer/Operator Display	5*8 fields LCD					
Weighing Capacity (Max.)	6/15kg; 15/30kg					
Division Value	2/5g; 5/10g					
Weighing Capacity (Min.)	40g; 100g					
Tare (Max.)	-5.998kg; -14.995kg					
Internal Resolution	1/30000					
Accuracy Class	III					
Interface	RS232					
Optional	USB communication line					
Working Temperature	0°C~40°C					

Note : Functions and appearance are subject to change without notice. Please refer to practicality.

Dimensions

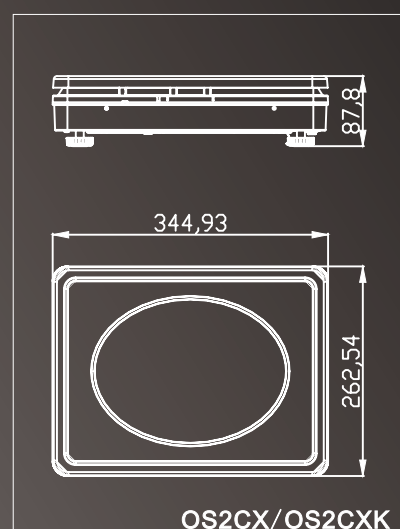

OS2XX series



Checkout Scale

With compact design and elegant appearance, OS2 can be used as stand-alone scale for self-weighing and pre-weighing, cash register scale via connecting with POS/ECR, and label scale via connecting with label printer.



Bullet-points:

- Patent insect-proof design prevents from breakdown caused by bugs.
- Imbedded design to save counter space, convenient for weighing.
- Capacitive key with high sensitivity, waterproof, anti-fouling and easy to clean.
- Support RS232, USB, able to transmit weighing data to POS/ECR in time without lines.

Desktop Type



OS2CX

- Display: N/A
- Keys: N/A
- Platter: stainless steel platter
- Interface: 1* RS232 port,.



OS2CXK

- Display: N/A
- Keys: 2 capacitive keys--high sensitivity, waterproof, anti-fouling and easy to clean.
- Platter: stainless steel platter
- Interface: RS232 port.


OS2CXB

- Display: inbuilt 5*8 field LCD display
- Keys: Tare, zero and power 3 keys under display, easy operation and convenient weighing information check.
- Platter: stainless steel platter
- Interface: RS232 port,




OS2CXP

- Display: 5*8 field LCD display pole
- Keys: Tare, zero and power 3 keys under display-- easy operation and convenient weighing information check.
- Platter: stainless steel platter
- Interface: RS232 port,

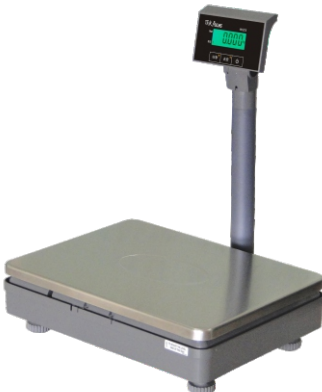

Imbedded Type

OS2IX(Imbedded Type)

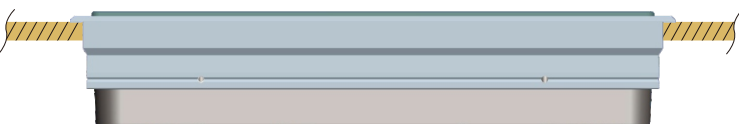

OS2IX

- Display: N/A
- Keys: 2 capacitive keys--high sensitivity, waterproof, anti-fouling and easy to clean.
- Platter: patented glass platter
- Interface: RS232 port
- Scale is Imbedded in table to save valuable counter space.

OS2IXD

- Display: stand-alone 5*8 field LCD display.
- Keys: Tare, zero and power 3 keys under display, easy operation and convenient weighing information check.
- Platter: patented glass platter
- Interface: RS232 port,
- Scale is Imbedded in table to save valuable counter space.

